



CRSTHV-2A 尺寸(Dimensions) 30.90X13.35X11.50mm

特点 Features						
1.Breakdown up to 4KV						
2.High Voltage Reed Relay						
订货信息 Ordering information						
CRSTHV- 12 – 2A- 4K						
1 2 3 4						
1.型号 Part number: CRSTHV						
2.线圈额定电压 Coil rated voltage(VDC):DC:5,12,24						
3.接触形式 Contact Form:2A						
4.崩溃电压 Breakdown Voltage:4KV,						
触点数据 Contact Rating						
Contact Arrangement			2A;			
Contact Rating			100W			
Max Switching Voltage			1000VAC peak/VDC			
Max Switching Current			1.0A			
Max Carrying Current			2.5A			
寿命 Operation Life		电气 Electrical		50VDC.10mA 0.5X10 ⁵ Ops		
		机械 Mechanical		1*10 ⁸ Ops		
线圈参数 Coil Parameter						
线圈电压 Coil voltage(VDC)		线圈电阻 Coil Resistance	线圈电流 Normal Current(mA)	释放电压 VDC Release voltage VDC(Min)	吸合电压 VDC(最大) Pick up Voltage VDC(Max)	
额定 Rated	最大 130% Max	$\Omega \pm 10\%$		(额定电压的 8%) (8% of rated voltage)	(额定电压的 75%) (75% of Rated voltage)	
5	6.5	150	33.3	0.4	3.8	
12	15.6	500	24.0	1.0	9.0	
24	31.2	1600	15.0	2.0	18.0	

注意:1,使用的线圈电压低于线圈额定电压时将会损害继电器的工作.

2,吸合,释放电压仅供检测用,不是设计的使用指标.

Caution:1,The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.

2,Pick up and release voltage are for test purposes only and are not be used as design criteria.

技术特性 Operation condition	
Contact Arrangement	2A
Contact Resistance	150m Ω
Breakdown Voltage	Open Contacts DC.4KV MIN Contacts to COIL DC.4KV MIN
Insulation Resistance	Open contacts 1X10 ¹⁰ Ω MIN.(DC.100V) Contacts to coil 1X10 ¹⁰ Ω MIN.(DC.100V)
Capacitance Across Contacts	0.2pF
Operate Time	1.0mS

CRST RELAYS


<http://www.crstrelay.com>

Reset Time	0.1mS
Operating Temperature	-20°C-+70°C
Storage Temperature	-35°C-+105°C
Soldering Temperature	5 sec. max 260°C


外形尺寸 Dimensions(mm)

CRSTHV-2A


Dimensions (Unit:mm)

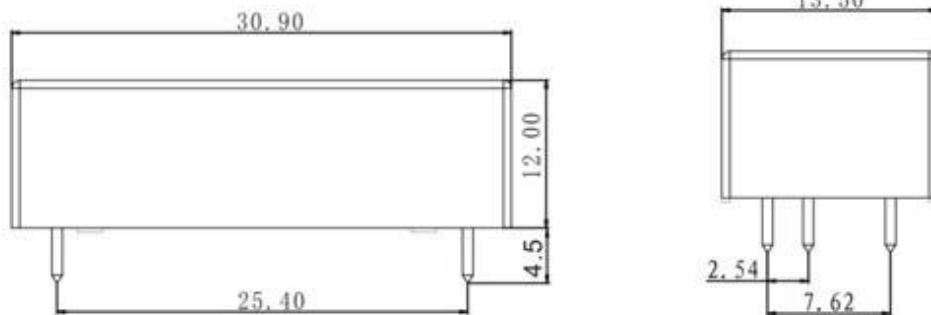

Wirng Diagrams(Top View)

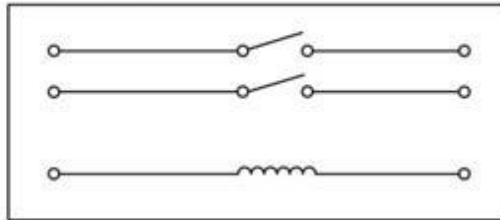

PCB Layout(Bottom View)

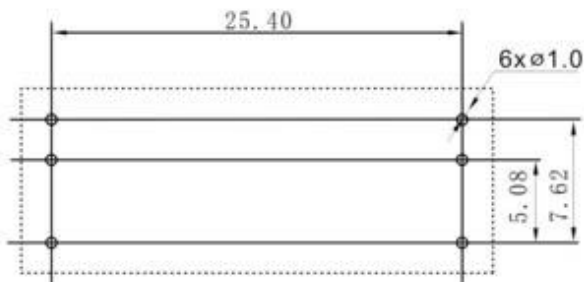

Dimension Tolerance: <1mm: ±0.2mm
 1-5mm: ±0.3mm
 >5mm: ±0.5mm